

## MOBILE HOME REVA 2

 $7 \times 3.5 \text{ m} \mid 24.5 \text{ m}^2$ 


- All year round, delivered complete
- For 4 people bedroom, living room with pullout couch, kitchenette and bathroom
- Also available in simplified, summer version
- External façade PVC siding or spruce paneling (option)
- Durable and rigid steel and wooden construction
- Internal walls finished with modern materials or wood (option)
- Optionally: Compact terrace and pergola



The Meveline house of the REVA series is a solution for both individual clients as well rental. It is a convenient alternative to houses built using the traditional method, wooden howithout foundations. Thanks After placing it on the target the surroundings.

Meveline houses are charac-55m2. Customers can choose



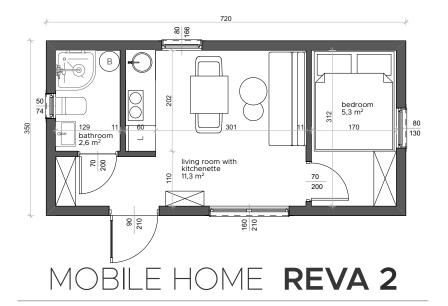

## STANDARD

External dimensions 7x3,5 m

**Construction:** steel with wooden elements, 2 axles of non-steer wheels (in mobile version)

**Outer wall:** multi-layer: finish from the inside - MDF panels or wood (option), OSB board, open steel profile, PUR foam insulation, vapor-permeable membrane, ventilated air gap, auxiliary grid, external facade

**Roof:** low gable, structure: ceiling finish, OSB board, roof truss, PUR insulation, vapor-permeable membrane, ventilated air space, auxiliary grate, steel roof tile, eaves, visible gutters and downpipes

**Floors:** galvanized sheet, steel profile, PUR insulation, OSB board, AC4 laminated panels or other covering (option)

Partition walls: OSB boards, wooden profiles, sound insulation - mineral wool, finished with a vinyl/MDF panel or wood (optional)

**Ceiling:** height 2.25 m-2.50 m (elevated living room as standard) finished with MDF or vinyl panels

**Windows:** 5 chambers with one-sided veneer in the color, ventilation function in selected windows, balcony window with a movable post

**Doors** external steel or PVC (option); internal white MDF

**Electrical installation:** 230V or 400V (option) - distribution box, conduit wires - 3x2.5 mm and 3x1.5 mm, sockets, contacts, external sockets

Water and sevage installation: electrically heated PEX-AL.-PEX pipes (all-year version), PVC sewage system


**Lightning:** ceiling LED inside, sconce and LED strip outside

**Heating:** installation ready for electric heaters or infrared panels (optional)

**Bathroom:** prepared for installation, installation of a bathroom (option)

**Kitchen:** prepared for the assembly of standard fittings and additional, as well as furniture

**Living room, bedroom:** fully prepared for furniture and fixing of radiators; walls and floors finished, internal doors mounted.



## ADDITIONAL PACKAGES

Package I - "Turnkey" bathroom

Bathroom: walls and ceiling, Motivo VOX panel, semi-circular corner cabin, com pact WC, washbasin with a 50cm cabinet 50cm hanging cabinet with a mirror, electric dryer - ladder, electric fan, installation for a washing machine, 50l cylindrical tankheater

**Package II** - Turnkey kitchen, plus electric radiators and furniture

Kitchen: lower and upper cabinets, worktop, under-counter fridge, absorber, 2-burner electric hob, one-chamber sink, installation for a dishwasher

Living room: according to individual arrangements, for example: a sofa bed with a sleeping function, table, wardrobe or shelves

Bedroom: according to individual arrange ments, for example: a double bed, a war drobe, optionally - shelves, a bunk bed fo 2 or 3 people

**Examples of additional equipment:** internal wall finish in bleached or oiled wood, LVT floor, air conditioning, IR underfloor heating, terrace, pergola, individual projects

## **Options:**

 Possible mirror arrangement of the interior or an individual arrangement according to a separate one project.

